

Technical Data User Interface UI400 for CMS

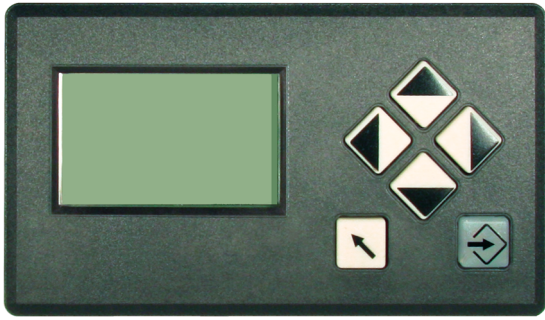


Fig. 1 Figure UI400

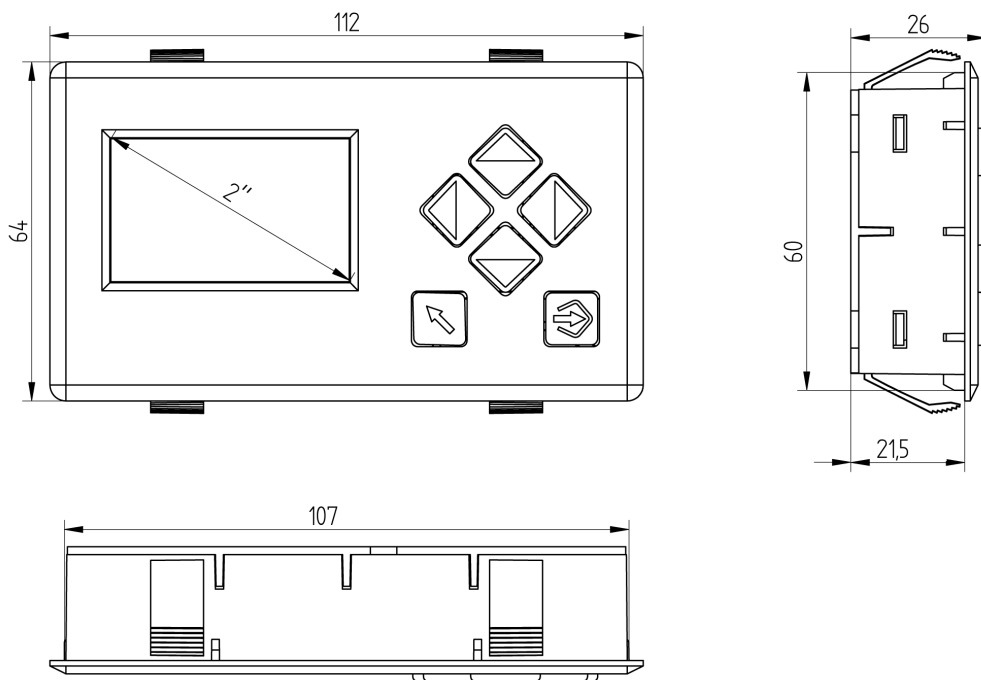


Fig. 2 Dimensional drawing UI400

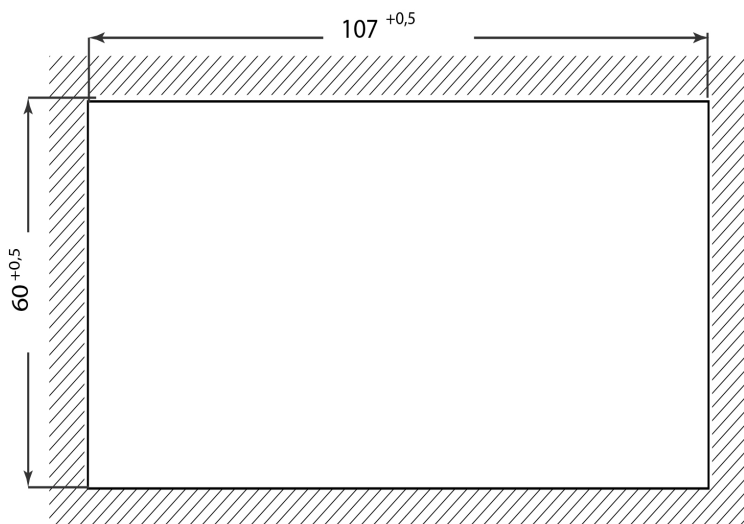


Fig. 3 Panel cutout UI400

Technical Data User Interface UI400 for CMS

Technical Data UI400

Display	128 x 64 pixels, monochrome white backlight (dimnable)
Dimensions (H x W x D)	64 x 112 x 26 mm 2.52 x 4.41 x 1.02" in
Weight	149 g 0.33 lb
Housing	basic housing: polyamide glass fibre reinforced LCD-display window: polycarbonate
Power supply voltage	Via LSB
Power consumption	1 W
Flammability	UL-94 V0
Cable length	2.5 m 98.42" in

Environmental Conditions

Operation	permitted temperature range	-30 ... +70 °C -22 ... +158 °F (condensation prohibited)	
	permitted humidity	5 ... 95 % relative humidity	
Transport/Storage	permitted temperature range	-40 ... +80 °C -40 ... +176 °F (condensation prohibited)	
	permitted humidity	5 ... 95 % relative humidity	
Degree of protection	DIN EN 60529	front	IP40
			IP65 (with additional cover)

EU Declaration of Conformity

2014/35/EU	Low Voltage Directive
2014/30/EU	EMC Directive
2014/68/EU	Pressure Equipment Directive Kat. 4 Mod. B+D
(EU) 2016/426	Gas Appliance Regulation (GAR)
2011/65/EU	RoHS

NOTICE

The limits of the technical data must be strictly adhered to.

Technical Data User Interface UI400 for CMS

Order Information

Display modules User Interface UI400

Description/Type	Order no.
UI400 User Interface, connection via LSB, cable length 2.5 m 8.2 ft Compact HMI for fault messages, curve programming, simple parametrisation and system queries. Protection class IP40 at the front.	668R0300

Approvals



The information in this publication is subject to technical changes.

LAMTEC GmbH & Co. KG

Josef-Reiert-Straße 26

69190 Walldorf

GERMANY

Telefon: +49 (0) 6227 6052-0

Telefax: +49 (0) 6227 6052-57

info@lamtec.de

www.lamtec.de

